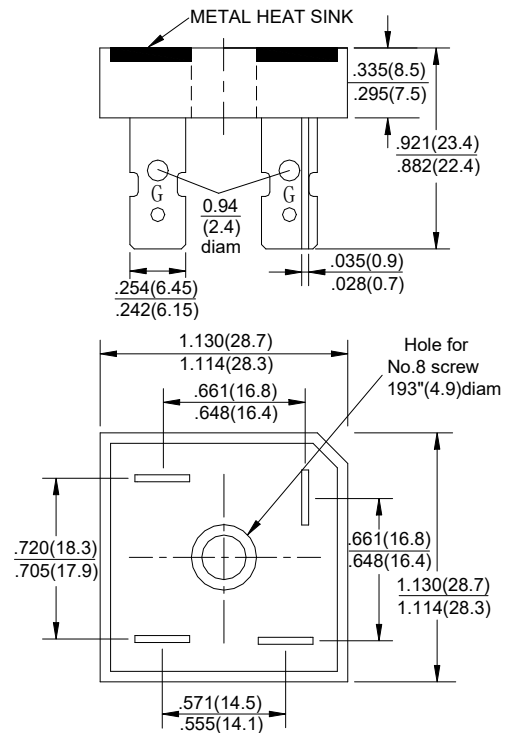


REVERSE VOLTAGE - **50 to 1000**Volts
 FORWARD CURRENT - **10/15/25/35/50**Amperes

- Surge overload 200–400 amperes peak
- Low forward voltage drop
- Mounting position :Any
- Electrically isolated base-2000 Vlots
- Solderable 0.25" FASTON terminals
- Materials used carries U/L recognition

**GBPC**

Dimensions in inches and (millimeters)

Rating at 25°C ambient temperature unless otherwise specified.

Resistive or inductive load 60Hz.

For capacitive load, derate current by 20%

[illegible]

RATING AND CHARACTERISTIC CURVES

GBPC10/15/25/35 SERIES

FIG.1-MAXMUN FORWARD SURGE CURRENT

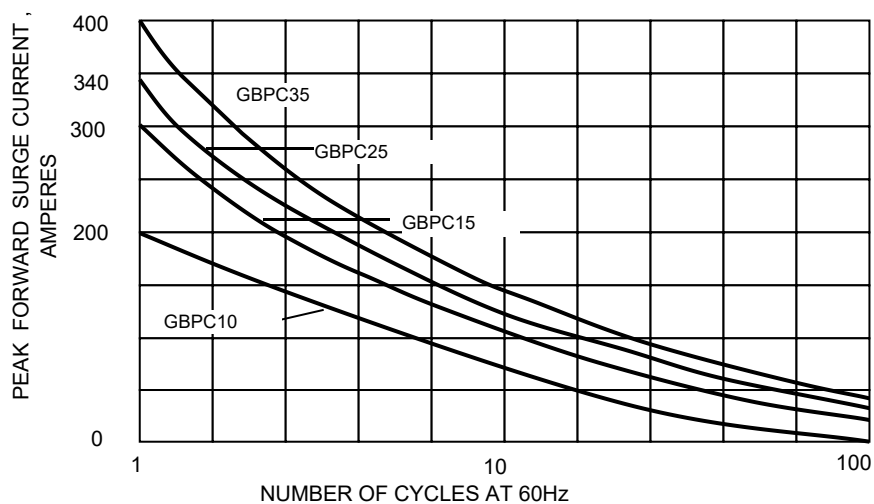


FIG.2- DERATING CURVE OUTPUT

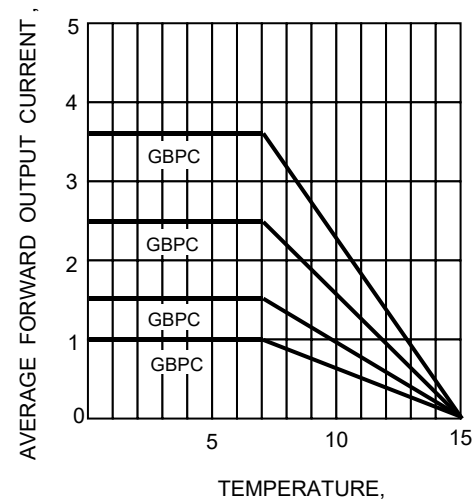


FIG.3-TYPICAL FORWARD CHARACTERISTICS

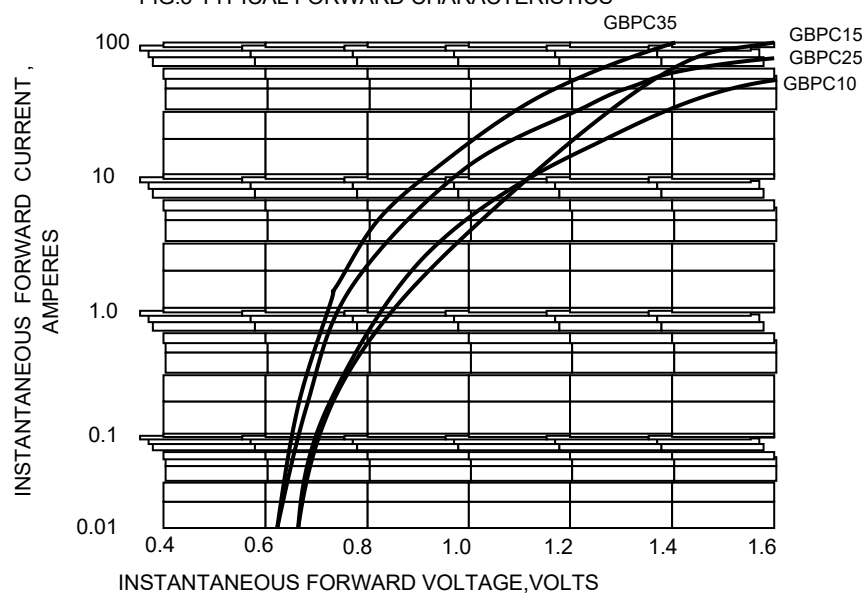


FIG.4-TYPICAL REVERSE

